



Washer extractor

W5330N

Features and benefits

- **Compass Pro® microprocessor offers:**
 - Large display and one control knob for easy program selection
 - Language selection
 - Quick selection and option buttons for the most frequently used wash programs and options
 - Wash program packages optimized on *Economy, Performance and Time*. (Available on general programs)
- Extremely low water and energy consumption – see table below
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient dewatering
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- SuperBalance guarantees the correct extraction force

Main options

- Automatic liquid detergent supply (optional I/O board)
- Connection to booking- /payment- system or coin meter



Images shown are a representation of the product only and variations may occur.

Main specifications				W5330N			
Max. capacity	filling factor 1:9	kg/lb		35/75			
Drum,	volume	litre		330			
	diameter	ø mm		795			
Extraction		rpm		474			
G-factor				100			
Standard heating alternatives		electricity	kW	19.1 / 19.8 / 23.0			
		steam		X			
		non-heated		X			
Consumption data "Normal 60°C"				EI		Steam**	
Economy*				Full load, 35 kg	Half load, 17.5 kg	Full load, 35 kg	Half load, 17.5 kg
Total time		min		51	48	51	48
Water consumption (cold+hot)		litre		210+57	167+36	267+0	203+0
Energy consumption (motor/heating/hot water)		kWh		0.4/1.65/3.65	0.4/1.05/2.3	0.4/-	0.4/-
Steam consumption		kg		-	-	7.95	5.05
Residual moisture		%		69	78	69	78
* Water temperature 15°C cold water and 65°C hot water.							
** Depending on steam pressure.							



Electrical connections*					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
	Hz	Hz			
Electric heated	220-240V 3 ~	50/60	23.0	24.2	63
	380-415V 3 ~	50/60	23.0	24.2	50
	440V 3 ~	60	23.0	24.1	50
	480V 3 ~	60	23.0	24.1	50
	220-230V 3 ~	50/60	19.1	20.3	63
	240V 3 ~	50/60	19.8	21.0	63
	380-400V 3 ~	50/60	19.1	20.3	50
	415V 3 ~	50/60	19.8	21.0	50
	Steam or Non heated	220-480V 1/3 ~	50/60	-	1.4

Water and steam connection	W5330N	
Water valves	DN	20
Water pressure	kPa	200-600
Capacity at 300 kPa	l/min	60
Drain valve	ø mm	75
Draining capacity	l/min	170
Steam valve	DN	15
Steam pressure	kPa	300-600
Liquid detergent supplies		5

Floor requirements		
Frequency of the dynamic force	Hz	7.9
Floor load at max extraction	kN	4.6 ± 5.6

Sound levels		
Sound power level (IEC 60704-2-4)		
wash	dB(A)	68
extraction	dB(A)	74

Heat emission		
% of installed power, max		5

Shipping data**		
Weight	net, kg	307
Shipping volume	m ³	1.86

Accessories		
Steel base		x
Hose kits for water or steam		x
Fluff collector		x


Dimensions in mm		
A	Width	910
B	Depth	1686
C	Height	1465
D		568
E		1114
F		1168
G		80
H		1367
I		347
J		247
K		1327
L		1247
M		278
N		104
O		209
P		162

1	Operating panel	7	Drain
2	Door opening ø 435 mm	8	Liquid detergent supply
3	Detergent box	9	Electrical connection
4	Cold water	10	Steam connection
5	Hot water		
6	Re-used water		


Front and side panels in light grey and blue (RAL 260 70 05, 250 60 30)

* Other voltages available, see installation manual


** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

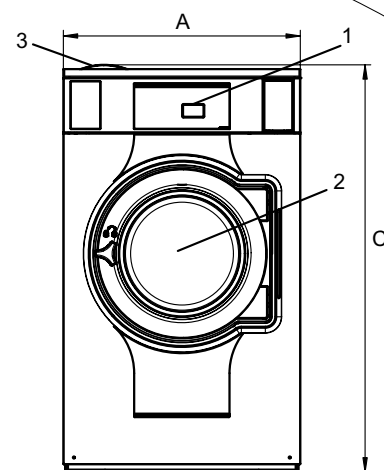

Front

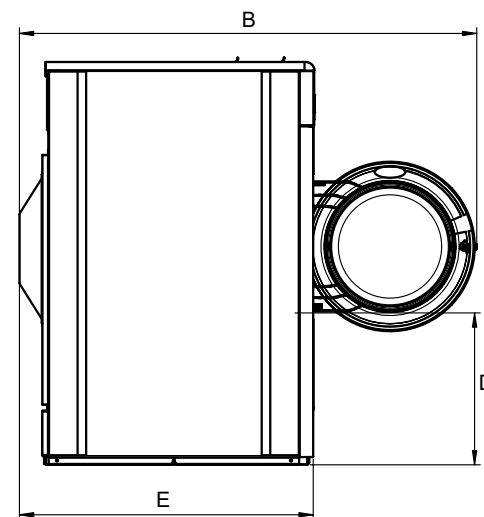

Side view

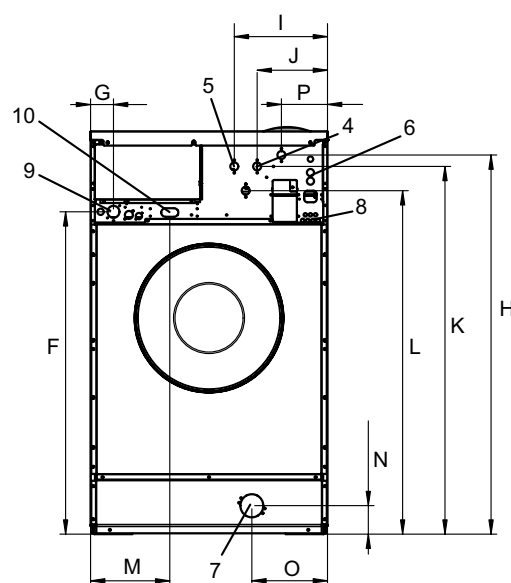

Rear