



DRYING

—

STACK DRYERS ADVANCE SR-2-11/16 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen.
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display. (ads, instructions)
- 37 languages.

OUTSTANDING FEATURES

- New POWERED gas heated model: more power to achieve more productivity.
- Reversing drum action as standard.
- Stainless steel drum as standard.
- Frequency inverter as standard.

EFFICIENCY

- MIXED FLOW - New 'optimized' system of mixed airflow.
- Big fluff filter.

VERSATILITY

- Make to order - customisation.
- WET CLEANING.
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

CONNECTIVITY

- FagorKonnnect IoT.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS

- Drawer as fluff filter, made of stainless steel.
- Biggest door diameters.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance.

OTHERS

- Grey skinplate outer casing, stainless steel look.
- SOFT TOUCH - new drum with stamped holes.
- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: electric, gas.
- CE approved.


OPTIONS

- iDRY - Intelligent humidity control. Temperature probe at drum inlet.
- Double door glass.
- FK - Integrated Fire Extinguishing System.
- FagorKonnnect communication kit - IoT.
- Tropicalized model.
- Rear panel external air + filter.
- Stainless steel outercasing.
- Stainless steel frontal panel.
- Stainless steel battery.
- Wooden packing.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral.

TECHNICAL DATA
STACK DRYERS | ADVANCE | SR-2-11/16 TP2

	UNIT.	SR-2-11 TP2	SR-2-16 TP2		
CAPACITY					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output*	Kg/h	2x14 - 2x13	2x21 - 2x20		
Evaporation capacity*	l/h	16,5	25,50		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547/1.522	547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,37x2	0,37x2		
Fan motor power STACK ADVANCE	Kw	0,25x2	0,25x2		
Electric heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (elec.model) STACK ADVANCE	Kw	25,34	25,34		
Gas heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (gas model) STACK ADVANCE	Kw	1,34	1,34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	785 / 865	784 / 865		
Net Depth / Gross Depth	mm	972 / 1.055	1.242 / 1.325		
Net Height / Gross Height	mm	1.980 / 2.126	1.980 / 2.126		
Net weight / Gross weight	Kg	260 / 268	290 / 303		
OTHERS					
Max airflow	m3/h	1000		1000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

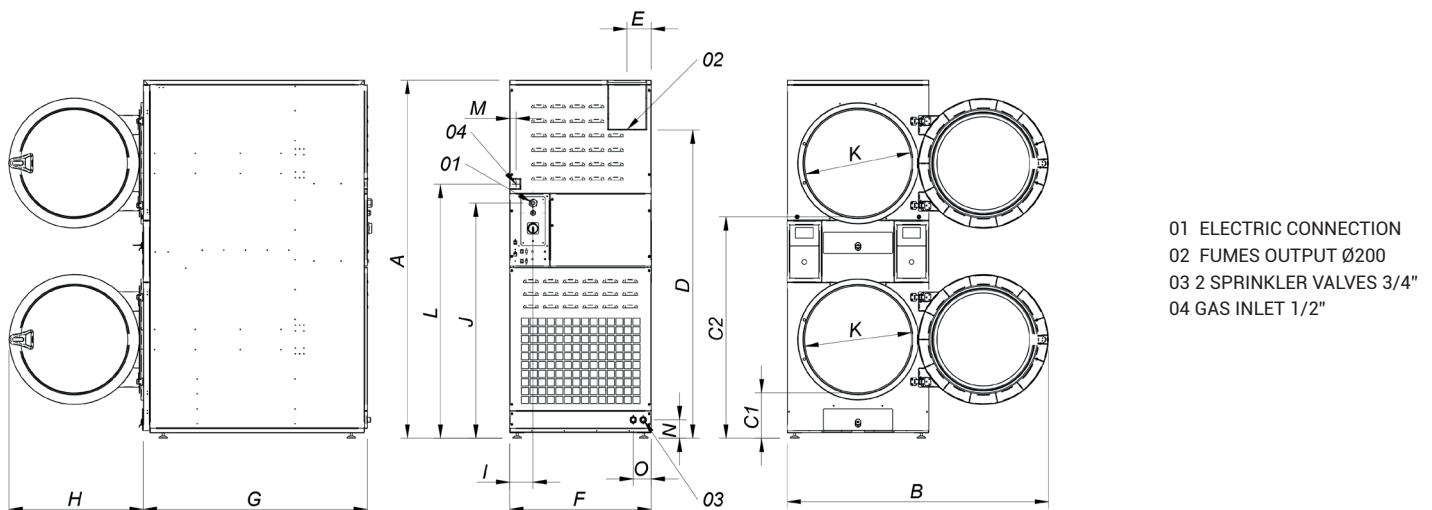

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
SR-2-11 TP2	1980	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	103	100
SR-2-16 TP2	1980	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	103	100