



WASHING

-

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-25/35C/45C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

G FACTOR

- High G-Factor: G-FACTOR 450 for high spin washers

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Water Recovery tanks ready: KRS
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Drain valve < > Pump
- Wet cleaning features

CONNECTIVITY

- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø460 (for LA-25) and Ø560 (for LA-35C/45C)
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged panel: easy access to parts
- Equivalent parts for all models: contactors, electronic devices, gear
- Technical menu: traceability, error diagnosis

OTHERS

- Grey skinplate outer casing
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- Electronic control of imbalance with frequency control
- LOADING AID system: water and rotation control
- CB and WRAS approved product. Option ETL

OPTIONS

- Double drain
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- DomusConnect communication IoT
- Silicon gasket (for LA-25)
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align loading height (door base at 850mm)
- Stainless steel outer casing
- Stainless steel front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Voltage 230 V III 50/60 Hz (for LA-35C/45C)
- Coin/token kit
- Delayed door opening in case of power outage




TECHNICAL DATA

HIGH SPIN WASHERS | LOW AND MEDIUM CAPACITY | LA-25/35C/45C TP2

	UNIT.	LA-25 TP2	LA-35C TP2	LA-45C TP2			
DRUM							
Load capacity 1:9 / 1:10	Kg	28/25	39/35	47/42			
Volume	l	250	350	420			
Diameter	mm	770	860	860			
Depth	mm	530	602	723			
GENERAL DETAILS							
Washing speed / Spining speed	r.p.m.	45/1024	42,5/966	42,5/966			
G Factor	-	450	450	450			
Maximum force transmitted	KN	4,92 ±1,75	7,36 ±2,45	7,36 ±2,45			
Frequency-dynamic force	Hz	15	14,3	14,3			
Sound level	dB	<70	<70	<70			
Coin laundry version	-	Yes	Yes	No			
Double drain	-	Opt	Opt	Opt			
Weighing System / Tilting System	-	Opt/No	Opt/No	Opt/No			
DOOR							
Height center door / Height door	mm	865/560	885/540	885/540			
Diameter	mm	460	560	560			
POWER							
Motor	kW	4	6	6			
Electric heating power	kW	18	21	21			
Total electric power (electric model)	kW	19,2	23	23			
Total electric power (hw, steam model)	kW	4	6	6			
CONNECTIONS							
		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	-	2x2,5+T/20A	-	-	-	-
Tension 230V - III + T	Nº x mm2 / A	3x16+T 63A	-	-	-	-	-
Tension 400V - III + N + T	Nº x mm2 / A	4x4+T 32A	-	4x6+T 40A	4X1,5+T 16A	4x6+T 40A	4X1,5+T 16A
Steam inlet (Steam mod.)	inch	3/4"		3/4"		3/4"	
Maximum steam consumption (Steam mod.)	Kg/h	15		18		18	
Water inlet	inch	3/4"		3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4		2-4	
Maximum water consumption*	Lit/h	175,5		261,3		261,3	
Drain	inch	3"		3"		3"	
Drainage capacity	Lit/min	200		200		200	
DIMENSIONS / PACKING DIMENSIONS							
Net Width / Gross Width	mm	979/1.040	1.095/1.165	1.095/1.165			
Net Depth / Gross Depth	mm	1.041/1.160	1.184/1.230	1.304/1.480			
Net Height / Gross Height	mm	1.553/1.850	1.598/1920	1598/1920			
Net weight / Gross weight	kg	490/545	750/820	800/870			
Volume	m3	2,23	2,75	3,31			

* N°20 Program, 75% load

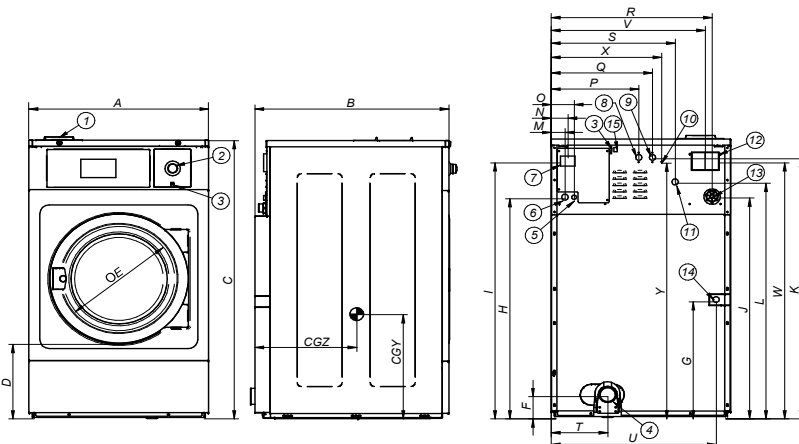

- 1- SOAP DISPENSER
- 2- EMERGENCY STOP
- 3- USB PORT
- 4- DRAIN
- 5- ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6- ELECTRICAL CONNECTION
- 7- MAIN SWITCH
- 8- AUXILIAR WATER INLET
- 9- HOT WATER INLET
- 10- EQUIPOTENTIAL CONNECTION
- 11- COLD WATER INLET
- 12- BLUR OUTPUT / WATER OVERLOAD
- 13- LIQUID SOAP CONNECTION
- 14- STEAM CONNECTION
- 15- ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LA-25	mm	979	1.041	1.553	560	460	133	490	1.282	1.450	1.259	1.465	1.354	61	74	101	481	561	861	673	367	909	831	1.424	624	1.510	773	710
LA-35C	mm	1.095	1.184	1.600	525	560	158	576	1.330	1.498	1.331	1.513	1.417	61	74	101	596	676	976	808	384	1.028	946	1.496	740	1.558	795	732
LA-45C	mm	1.095	1.304	1.600	525	560	158	576	1.330	1.498	1.331	1.513	1.417	61	74	101	596	676	976	808	384	1.028	946	1.496	740	1.558	795	800