



WASHING

HIGH SPIN WASHERS HIGH CAPACITY LA-60/100C/120C TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen.
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display. (ads, instructions)
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor: G-FACTOR 450 (for LA-60) and G-FACTOR 350 (for LA-100C/120C)

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

VERSATILITY

- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY

- Remote technical service.
- Management of laundries: OPL.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø560 (for LA-60) and Ø700 (for LA-100C/120C)
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum and tub in stainless steel AISI 304
- 3 water inlets (Water inlet hoses not included)
- Soft mounted, free standing washers.
- Panels in skinplate
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. Option ETL.
- Tropicalized model: protected board.

OPTIONS


- Double drain.
- Normally closed valve for LA-60.
- Tilting options: frontal or double tilt.
- Water inlet hose. (for LA-60)
- Auto Weight: automatic weighing sensor system on feet. (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals.
- Printer.
- FagorConnect IoT.
- Reversible door opening (for LA-60)
- Kit to transform an E or HW heated machine into steam version. (for LA-60)
- Double heating E + S. (for LA-60)
- Panel to cover feet for LA-60.
- Stainless steel outer casing.
- Stainless steel front panel.
- Panel to cover feet for LA-60 .
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Voltage 230V III 50/60 Hz.

TECHNICAL DATA

HIGH SPIN WASHERS | HIGH CAPACITY | LA-60/100C/120C TP2

	UNIT.	LA-60	LA-100C	LA-120C		
DRUM						
Load capacity 1:9 / 1:10	Kg	67/60	105/95	128/115		
Volume	l	600	950	1.150		
Diameter	mm	1.048	1.360	1.360		
Depth	mm	684	654	792		
GENERAL DETAILS						
Washing speed / Spinning speed	r.p.m.	38 / 875	34 / 678	34 / 678		
G Factor	-	450	350	350		
Maximum force transmitted	KN	12,95 ±4,2	37,77 ±5,25	37,77 ±5,25		
Frequency-dynamic force	Hz	12,66	11,33	11,33		
Noise level	dB	<70	<70	<70		
Coin laundry version	-	No	No	No		
Double drain	-	Opt	Opt	Opt		
Weighing System / Tilting System	-	Opt/Opt	Opt/Opt	Opt/Opt		
DOOR						
Height center door / Height door	mm	1.190/830	1.330/900	1.330/900		
Diameter	mm	560	700	700		
POWER						
Motor	kW	11	15	15		
Electric heating power	kW	36	-	-		
Total electric power (electric model)	kW	40	-	-		
Total electric power (hw, steam mod.)	kW	11	15	15		
CONNECTIONS						
		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER	STEAM / HOT WATER
Tension 230V - III + T	N° x mm2 / A	3x25+T / 100A	0	-	-	-
Tension 400V - III + N + T	N° x mm2 / A	4x16+T / 63A	4x4+T / 32A	-	4x6+T / 40A	4x6+T / 40A
Steam inlet (Steam model)	inch	3/4"		1-1/4"		1-1/4"
Maximum steam consumption (Steam model)	Kg/h	18		26,5		26,5
Water inlet	inch	1"		1-1/2"		1-1/2"
Water main pressure	Kgs/cm ²	2-4		2-4		2-4
Compressed air inlet	inch	-		1/4"		1/4"
Compressed air pressure	Bar	-		4		4
Maximum water consumption**	Lit/h	633		1.254		1.254
Drain	inch	3"		4"		4"
Drainage capacity	Lit/min	200		500		500
DIMENSIONS / PACKING DIMENSIONS						
Net Width / Gross Width	mm	1.478/1.540	1.815/1.900	1.815/1.900		
Net Depth / Gross Depth	mm	1.444/1.580	1.690/1.940	1.828/1.940		
Net Height / Gross Height	mm	1.945/1.970	2.245/2.290	2.245/2.290		
Net weight / Gross weight	kg	1.400/1.520	3.900/4.050	3.950/4.100		
Volume	m ³	4,79	8,44	8,44		

* N°2 Program, 100% load

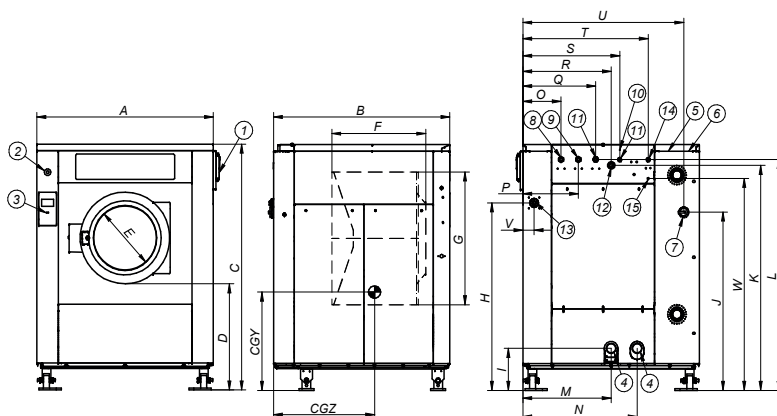

- 1- SOAP DISPENSER
- 2- EMERGENCY STOP
- 3- USB PORT
- 4- DRAIN
- 5- ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6- ELECTRICAL CONNECTION
- 7- MAIN SWITCH
- 8- AUXILIAR WATER INLET
- 9- HOT WATER INLET
- 10- EQUIPOTENTIAL CONNECTION
- 11- COLD WATER INLET
- 12- BLUR OUTPUT / WATER OVERLOAD
- 13- LIQUID SOAP CONNECTION
- 14- STEAM CONNECTION
- 15- AIR INTAKE

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
LA-60	mm	1.427	1.426	1.945	825	560	760	1.050	1.500	350	1.420	1.780	1.842	714	924	309	449	589	715	784	968	1.300	90	1.692	644	972
LA-100C	mm	1.765	1.650	2.245	945	700	792	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.025
LA-120C	mm	1.765	1.832	2.245	945	700	930	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.130