

DRYING

SINGLE POCKET DRYERS ADVANCE+ SR-11/14 TP2 PLUS



CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages

OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

EFFICIENCY

- iDRY - Intelligent humidity control. With new drum inlet temperature control.
- GREEN FLOW - Efficient air recirculation system
- DOUBLE SKIN - Provides thermal insulation
- Double door glass
- MIXED FLOW - New 'optimized' system of mixed airflow
- Big fluff filter

VERSATILITY

- Make to order - customisation
- WET CLEANING

CONNECTIVITY

- FagorKonnect IoT

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS

- Grey skinplate outer casing, stainless steel look
- FK - Integrated Fire Extinguishing System
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- New dosing/vaporizing system
- FagorKonnect communication kit
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steel battery
- Low pressure steam battery
- Wooden packing
- Reverse door opening
- Rear panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Ship voltage for electric models: 440V III 50/60 Hz No N

TECHNICAL DATA

SINGLE POCKET DRYERS | ADVANCE+ | SR-11/14 TP2 PLUS

	UNIT.	SR-11 TP2 PLUS	SR-14 TP2 PLUS		
CAPACITY					
Capacity 1/18	Kg	12	15		
Capacity 1/20	Kg	11	13,5		
Hourly Output ADVANCE+*	Kg/h	24-21	36-32		
Evaporation capacity ADVANCE+*	l/h	15	15,6		
DRUM					
Ø Drum	mm	750	750		
Ø Door (load hole)	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	610		
Drum volume	l	210	270		
POWER					
Drum motor power	Kw	0,37	0,37		
Fan motor power ADVANCE+	Kw	0,55	0,55		
Electric heating power ALL RANGES	Kw	12	18		
Total electric power (elec.model) ADVANCE+	Kw	12,97	18,97		
Gas heating power ALL RANGES	Kw	20,51	20,51		
Total electric power (gas model) ADVANCE+	Kw	0,97	0,97		
Steam heating power ALL RANGES	Kw	30	30		
Steam heating power (gas model) ADVANCE+	Kw	0,97	0,97		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	N° x mm2 / A	3 x 25 / 63A	3 x 1,5 / 20A	-	3x1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 10 / 40A	3 x 1,5 / 20A	4x16 / 63A	3x1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 4 / 25A	3 x 1,5 / 20A	5x10 / 32A	3x1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	855 / 940		989 / 1074	
Net Height / Gross Height	mm	1.694 / 1.840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		180 / 190	
OTHERS					
Max airflow ADVANCE+	m3/h	1.200		1.200	
Ø Fume exhaust	mm	200		200	
Sound level ADVANCE+	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

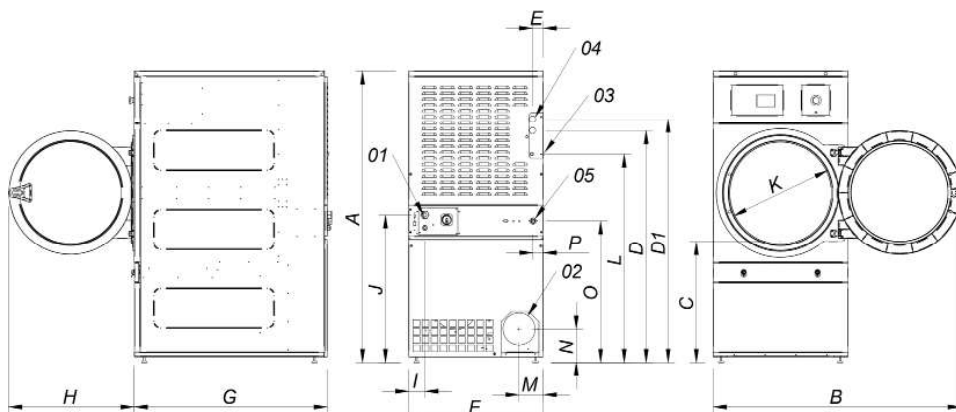

- 01 POWER SUPPLY
- 02 FUMES OUTLET Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SR-11	1694	1447	689	1354	1422	68	68	785	855	735	95	870	575	1226	133	180	830	65
SR-14	1694	1447	689	1354	1422	68	68	785	989	735	95	870	575	1226	133	180	830	65