

**Xtreme**  
in innovation

**primus**

laundry equipment

## HIGH EFFICIENT SOFT MOUNTED WASHER EXTRACTORS

**FX65 FX80 FX105 FX135**



### FEATURES

- Freestanding, high spin (up to 1165 RPM - FX65,80)
- Stainless steel top panel & Anthracite grey front and side panels
- Stainless steel drum and tub
- Xcontrol - easy to use microprocessor
- Patented Soap Hopper
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

### OPTIONS

- Xcontrol Plus - Fully programmable
- Coin operated timer (CPS)
- Stainless steel front and side panels
- USB plug (on the back panel)
- Easy Soap - liquid soaps connection
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- Drain pump (FX65, 80)
- 3rd water inlet



ERGONOMICAL  
CONSTRUCTION



LARGE DOOR  
OPENING



LOW WATER AND ENERGY  
CONSUMPTION

**cascade**  
drum




**supereco**


**POWERWASH**

**TRACE-TECH**


| TYPE                         |            | FX 65        | FX80         | FX105        | FX135        |
|------------------------------|------------|--------------|--------------|--------------|--------------|
| INNERDRUM                    |            |              |              |              |              |
| maximum capacity 1:9         | kg         | 7            | 9            | 12           | 15           |
| capacity 1:10                | kg         | 6,5          | 8            | 11           | 14           |
| volume                       | litres     | 65           | 75           | 105          | 135          |
| diameter                     | mm         | 530          | 530          | 620          | 620          |
| DRUM SPEED                   |            |              |              |              |              |
| wash                         | rpm        | 49           | 49           | 49           | 49           |
| extraction                   | rpm        | 1165         | 1165         | 1075         | 1075         |
| G-FACTOR                     |            | 400          | 400          | 400          | 400          |
| HEATING                      |            |              |              |              |              |
| electricity (standard)       | kW         | 6 / 9        | 6 / 9        | 6 / 9 / 12   | 9 / 12       |
| steam                        | bar        | 1 - 8        | 1 - 8        | 1 - 8        | 1 - 8        |
| hot water                    | °C         | 90           | 90           | 90           | 90           |
| Sound pressure level         | dB (A)     | < 65         | < 65         | < 65         | < 65         |
| Water valves connection      | BSP        | 3/4"         | 3/4"         | 3/4"         | 3/4"         |
| Water pressure               | kPa        | 100-800      | 100-800      | 100-800      | 100-800      |
| Rec. water pressure          | kPa        | 300-500      | 300-500      | 300-500      | 300-500      |
| Water inlet                  | l/min      | 20           | 20           | 20           | 20           |
| Drain valve                  | outer Ø mm | 76           | 76           | 76           | 76           |
| Flow amount with drain valve | l/min      | 210          | 210          | 210          | 210          |
| Steam valve connection       | BSP        | 1/2"         | 1/2"         | 1/2"         | 1/2"         |
| Steam pressure               | kPa        | 100-800      | 100-800      | 100-800      | 100-800      |
| DIMENSIONS                   |            |              |              |              |              |
| Size HxWxD                   | mm         | 1115x710x740 | 1115x710x790 | 1225x795x795 | 1225x795x945 |
| TRANSPORT DATA               |            |              |              |              |              |
| Gross                        | kg         | 180          | 200          | 235          | 275          |
| Net                          | kg         | 170          | 185          | 210          | 255          |
| Packed HxWxD                 | mm         | 1235x735x825 | 1235x735x825 | 1340x820x825 | 1350x820x970 |

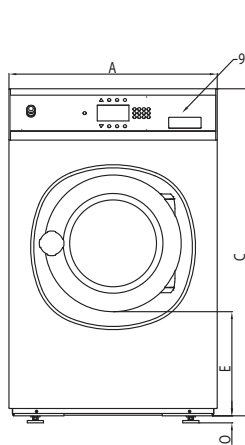

Front side

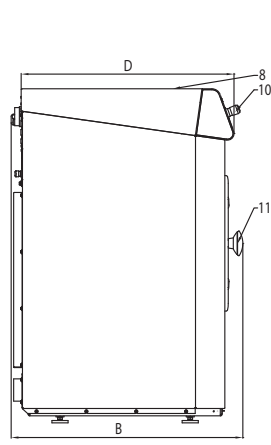

Left side

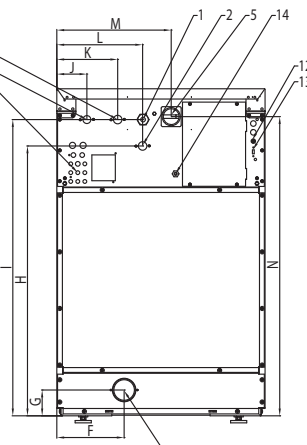

Rear side

- 1 Electrical connection
- 2 Hot water
- 3 Cold water hard
- 4 Cold water soft
- 5 Main switch
- 6 Liquid soap connection
- 7 Drain
- 8 Soap dispenser
- 9 Control panel
- 10 Button CENTRALSTOP
- 11 Door opening, FX65, FX80: Ø 330mm; FX105, FX135: Ø 410mm
- 12 Fuses
- 13 USB port
- 14 Electrical connection to liquid soap pumps

#### DIMENSIONS

|       | A     | B     | C      | D   | E   | F   | G  | H    | I    | J   | K   | L   | M   | N    | O  |
|-------|-------|-------|--------|-----|-----|-----|----|------|------|-----|-----|-----|-----|------|----|
| FX65  | 710   | 740   | 1115   | 676 | 349 | 230 | 82 | 914  | 1004 | 113 | 218 | 293 | 390 | 1020 | 24 |
| FX80  | 710   | 790   | 1115   | 726 | 349 | 230 | 88 | 920  | 1010 | 113 | 218 | 293 | 390 | 1020 | 24 |
| FX105 | 795   | 795   | 1225   | 761 | 342 | 230 | 88 | 1030 | 1120 | 103 | 208 | 293 | 475 | 1130 | 24 |
| FX135 | 795   | 945   | 1225   | 911 | 342 | 230 | 88 | 1030 | 1120 | 103 | 208 | 293 | 475 | 1130 | 24 |
|       | width | depth | height |     |     |     |    |      |      |     |     |     |     |      |    |

|                         |        | FX80 |
|-------------------------|--------|------|
| Water consumption       | l/kg   | 7,2  |
| Electricity consumption | kWh/kg | 0,19 |

\* Program No 11



WATCH THE FX VIDEO  
www.bit.ly/videofox



The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

