

INDUSTRIAL TUMBLE DRYER

T
RANGE

T 11 HP	T 13 HP	T 16 HP
11KG 77LB	13KG 53LB	16KG 77LB




FEATURES

- Heat pump
- Standard stainless steel drum with large diameter
- Easy-to-use microprocessor (ECT)
- Combination of Radial and Axial airflow
 - RADAX® concept:
 - maximal heat transfer
 - low energy consumption
 - short drying time
- Large door opening for easy loading and unloading
- Self cleaning lint screen

OPTIONS

- Coin operated version
- Reversing drum
- Full Control programmer (FCT)
- Residual moisture control Sensodry®:
 - safe drying of delicate linen
 - humidity detection in %
 - ideal in combination with SoftWash®
 - ideal for dry cleaners, fire depts
 - available on Easy and Full Control
- Stainless steel front



STANDARD
STAINLESS STEEL
DRUM



HEAT PUMP




ENERGY
EFFICIENT

TYPE		T11 HP	T13 HP	T16 HP
CAPACITY				
Drum capacity	kg/lb	11/24	13/27	16/35
Drum volume	l	250	285	345
Drum diameter	mm	Ø 760	Ø 760	Ø 760
DRYING AVERAGE	g/min	126	120	120
MOTORS				
Fan	kW	0,30	0,30	0,30
Drive	kW	0,25	0,25	0,25
HEAT PUMP				
Electrical connection				
Energy	kW	3,6	3,6	3,6
PROGRAMMER				
Easy control - antivandal (ECT)		Standard	Standard	Standard
Full control (FCT)		Available	Available	Available
DIMENSIONS				
H×W×D	mm	1680x795x1525	1680x795x1615	1680x795x1735
Net weight	kg	350	360	375
TRANSPORT DATA				
Packed H×W×D	mm	1785×855×1540	1785×855×1635	1785×855×1750
Gross weight	kg	385	400	400



Energy consumption comparison - conventional dryer vs. heat pump dryer

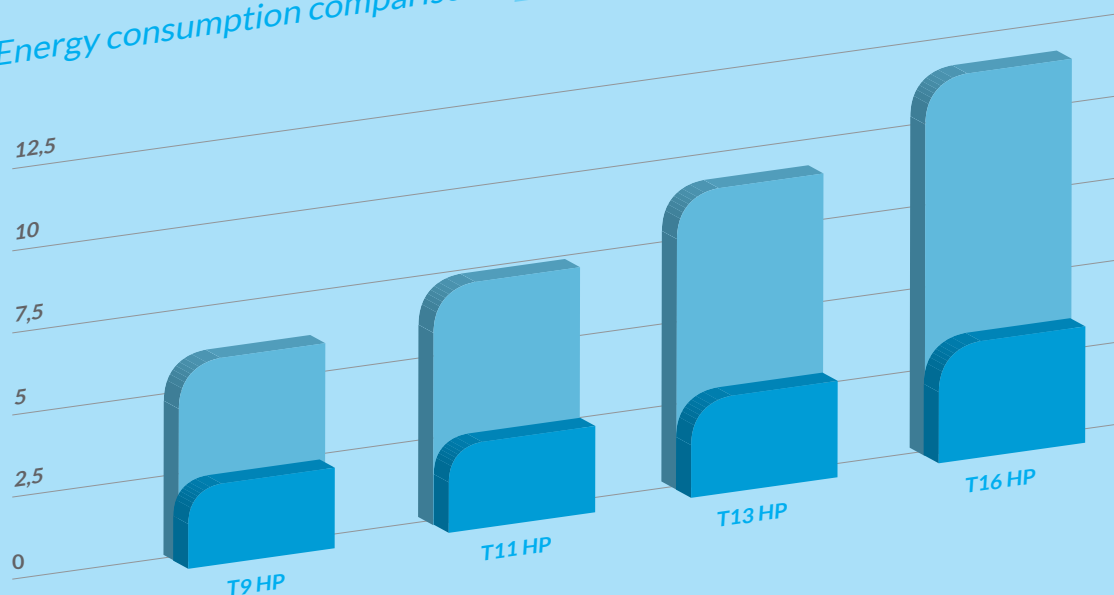

WATCH THE T HP VIDEO

www.bit.ly/videoevo4

